



Industrie Service

# CERTIFICATE

(Certificate of conformity with technical requirements in: )  
API SPEC 6FA Third Edition, April 1999

Certificate No.:250807 Rev.1

Ref. Test report No.:250808 Rev.1

Name and postal address of manufacturer: **Antiwear (Suzhou) Industrial Intelligent Technology Co., Ltd.**  
No.988, Yuexiu Road, Fenhui Economic Development Zone, PC: 215200, Suzhou City, Jiangsu Province, P. R. China

We hereby certify that the fire test on below valves have been conducted at the laboratory designated by manufacturer and witnessed by TÜV inspector according to requirements of API SPEC 6FA Third Edition, April 1999, Reaffirmed, September 2011. The testing results of valves meet the requirements of API SPEC 6FA.

## 1. Description of Test Valve :

Type of Test Valve	AB-4-T21-600-RF-01-C-16-W-C Ball Valve
Description of Valve	Ball Valve
Valve Size (NPS)	4"
Pressure Rating ( ANSI Class )	Class 600
Valve Body Material	ASTM A216 WCB

## 2. Qualified Range of Valves :

Type	Ball Valves
Description of Valves	Ball Valves
Qualified Sizes (NPS) ( according to API 6FA Table 2 )	4", 6", 8"
Qualified Pressure Ratings ( Class ) ( according to API 6FA Table 3 )	600;900
Qualified Marking ( according to API 6FA Para.7 )	Qualified valves shall be permanently marked: <b>6FA</b>
Remark: the technical data of test valve see back of this certificate appendix 1.	

This certificate is issued according to API SPEC 6FA Third Edition, April 1999, Reaffirmed, September 2011, based upon the result of testing report on above mentioned test valve. The additional valves qualification shall be limited on similar valves of same basic design as the test valve and same nonmetallic materials as the test valve in the seat-to-closure member seal, seat-to-body seal, stem seal, and body joint and seal according to API SPEC 6FA Third Edition, April 1999, Reaffirmed, September 2011, Para.4.8.

Shanghai, July 21, 2022  
(Place, date)

*chen*  
Guilin Chen  
TÜV SÜD Industrie Service GmbH

Westendstr.199  
80686 München Germany



Industrie Service

## Appendix 1:

Certificate No.:250807 Rev.1

Ref. Test report No.:250808 Rev.1

Name and postal address of manufacturer: **Antiwear (Suzhou) Industrial Intelligent Technology Co., Ltd.**  
No.988, Yuexiu Road, Fenhui Economic Development Zone, PC: 215200, Suzhou City, Jiangsu Province, P. R. China

### Technical Data of Valve

1. Type of Test Valve: AB-4-T21-600-RF-01-C-16-W-C Ball Valve

2. Description of Test Valve: Ball Valve

3. Details of Valve:

Valves Size ( NPS ) Material Part Name	4"
Valve Body	ASTM A216 WCB
Valve Bonnet	ASTM A216 WCB
Ball	ASTM A182 F316+G20
Valve Seat	ASTM A182 F316+G06
Valve Stem	ASTM A564 630
Packing Ring	Flexible Graphite
Packing Plate	ASTM A105
Nut	ASTM A194 2H
Bolt	ASTM A193 B7
Double-screw Bolt	ASTM A193 B7
Graphite Packing	Flexible Braided Graphite
Pressure Ring	ASTM A276 316
Bottom Cover	ASTM A105
Disc Spring	ASTM A564 631
Bottom Shaft	ASTM A564 630
Gasket	ASTM A276 316+Flexible Graphite
Design Drawing No.:	10020566 VER.1.0

**Shanghai, July 21, 2022**  
(Place, date)

*Chen Guilin*

**Guilin Chen**

**TÜV SÜD Industrie Service GmbH**

Westendstr.199  
80686 München Germany

TÜV SÜD Industrie Service GmbH  
Shanghai Office  
Floor 3-13, No.151, Heng Tong Road,  
Shanghai 200070 P. R. China

Tel.: +86 21 6141-0123  
Fax: + 86 21 6140-8600



## Test Report

(Fire test for valves according to API SPEC 6FA, Third edition, April 1999)

Certificate No.:250807 Rev.1  
Test Report No.:250808 Rev.1

Applicant / Manufacturer: Antiwear (Suzhou) Industrial Intelligent Technology Co., Ltd.  
No.988, Yuexiu Road, Fenu Economic Development Zone,  
PC: 215200, Suzhou City, Jiangsu Province, P. R. China

Inspection body: TÜV SÜD Industrie Service GmbH  
Floor 3-13, No.151, Heng Tong Road, Shanghai, P. R. China

Lab of test: Hefei General Machinery & Electrical Products Inspection Institute

Test Date: May 24, 2017

Description of valves: AB-4-T21-600-RF-01-C-16-W-C Ball Valve

Size: 4"

Pressure Rating: Class 600

Drawing No.: 10020567 VER. 1.0

Test Witnessed By: CHEN Guilin / TÜV SÜD Inspector




## Inspection and Tests

### 1. Conformity of Equipment

The test equipment was verified by TÜV SÜD inspector according to requirements of API SPEC 6FA Section 2 and Para 3.1 and found satisfactory. The detail arrangement of the fire-test equipment is shown below:

**Figure 1** Typical Fire-Test System Using a Pump as the Pressure Source

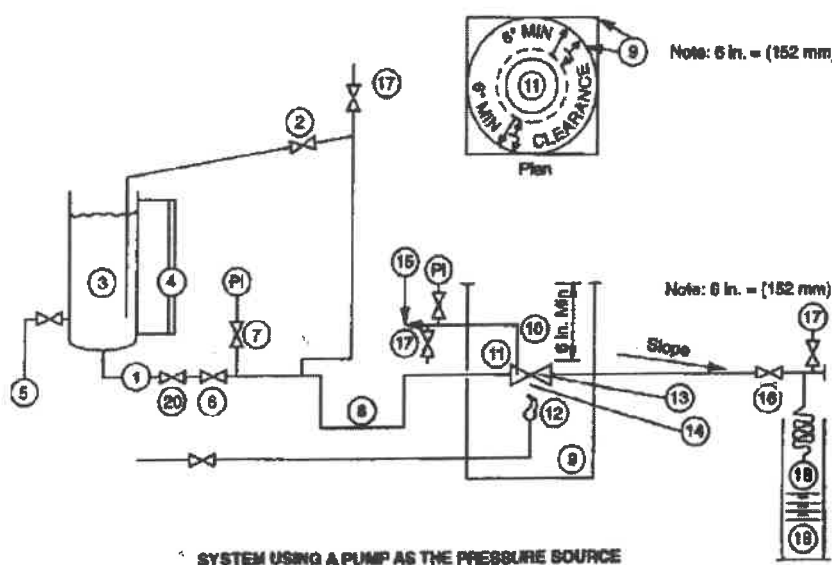

### Legend

- |   |   |
|---|---|
| 1. Pressure source  | 11. Test valve mounted horizontally with stem in horizontal position    |
| 2. Pressure regulator and relief  | 12. Fuel gas supply to burners  |
| 3. Vessel for water   | 13. Calorimeter-1½" in. cubes   |
| 4. Calibrated sight gauge   | 14. Flame temperature thermocouples                                     |
| 5. Water supply   | 15. Pressure gauge and relief valve connected to center cavity of valve |
| 6. Shutoff Valve  | 16. Shutoff valve   |
| 7. Pressure gauge   | 17. Vent valve  |
| 8. Piping arranged to provide vapor trap  | 18. Condenser   |
| 9. Enclosure for test—horizontal clearance between any part of the valve and the closure shell shall be 6 in. (152mm) above | 19. Calibrated container.   |
| 10. Minimum height of enclosure shall be 6 in. (152mm) above the top of the valve   | 20. Check valve   |





## 2. Calibration of measurement and test instrument

The measurement and test instrument have been properly calibrated such as pressure gauge, thermocouples, etc.

## 3. Technical Data of Test Valve:

### a)Description of test valve

Type of Test Valves	AB-4-T21-600-RF-01-C-16-W-C Ball Valve
Description of Valves	Ball Valve
Pressure Class , Lb	Class 600
Valve Size, NPS	4"
Face to Face	ASME B16.10
Designed Standard	API608

### b)Details of technical data on test valve

Part Name	Materials
Valve Body	ASTM A216 WCB
Valve Bonnet	ASTM A216 WCB
Ball	ASTM A182 F316+G20
Valve Seat	ASTM A182 F316+G06
Valve Stem	ASTM A564 630
Packing Ring	Flexible Graphite
Packing Plate	ASTM A105
Nut	ASTM A194 2H
Bolt	ASTM A193 B7
Double-screw Bolt	ASTM A193 B7
Graphite Packing	Flexible Braided Graphite
Pressure Ring	ASTM A276 316
Bottom Cover	ASTM A105
Disc Spring	ASTM A564 631
Bottom Shaft	ASTM A564 630
Gasket	ASTM A276 316+Flexible Graphite
Design Drawing No.:	10020566 VER.1.0








**Test Report No.:250808 Rev.1**

**4. Visual and dimensional Check on Valve Specimen:**

The specimen valve was chosen at random by the manufacturer in its workshop and submitted to the laboratory. The visual and dimensional check was performed according to drawing No. 10020567 VER. 1.0 and results found satisfactory.

	<u>4"</u>	<u>600</u>	<u>WCB</u>
Manufacturer` Brand	Size	Class	Material

The sample valve was equipped with a worm gearbox.

**5. Document Review:**

The chemical and mechanical test report of castings was reviewed and found satisfactory. Also the inspection report of strength test, seal test and pneumatic test were reviewed and found satisfactory.

**6. Preparation before testing:**

6.1 The thermocouples and calorimeters were installed properly according to Figure 1,2,3,4 in API 6FA. Two thermocouples (part 14) are installed to measure flame temperature, one is located under valve body, another is located under valve stem, both within 1". Two calorimeters (part 13) are positioned to the same place as the thermocouples do.

6.2 The test system including test valve (part 11) was cleaned through by water before testing. All air was purged from test valve and testing system by water.

6.3 The test system was pressurized to 7.5 MPa (test pressure) after the test valve and system upstream of valve have been completely full of water and system downstream of the test valve have been completely empty of water. The system and test valve were carefully checked for leakage when the test pressure was held at 7.5 MPa. No leakage was found on system and test valve.

**7. Fire Test:**

**7.1. Fire test with high pressure**

The fire test was conducted according to API 6FA Section 3. The flame temperature reached 761°C within 2 minutes after ignition. The test pressure and temperature were maintained during the fire test. The temperature and pressure were recorded continuously by the operators. The system and test valve was cooled down at 30°C within 5 minutes by natural after 30 minutes fire test. The loss of water weight in vessel was measured by weighing scale and water in calibrated container (part 19) were read and recorded.





**Test Report No.: 250808 Rev.1**

**Test result of fire test with high pressure**

Item	API 6FA Required Value	Actual Value
Test Pressure ( MPa )	7.5 MPa	7.45– 7.55 MPa
Test Temperature	761 - 980°C	814.4 - 890.9°C
Through-valve leakage according to API 6FA Para.4.1	≤ 400 ml / in. / min	4.9 ml / in. / min
Total weight of water through valve seat during cooling down period	0 ml	
Total time from fire test to cooling down	35 Minutes	
External Leakage	≤ 100 ml / in. / min	0 ml / in. / min
Conclusion: the test result is satisfactory according to API 6FA.		

**7.2. Fire test with low pressure**

Decrease the test pressure to 0.72 MPa and maintain this pressure for 5 minutes, measure the through valve and external leakage for this period of 5 minutes.

The test result of the above both is shown as below:

**Test result of low pressure test**

Item	API 6FA Required Value	Actual Value
Test Pressure ( MPa )	0.72 MPa	0.72MPa
Test Duration	5 Minutes	
Through-valve leakage according to API 6FA Para.4.3	≤ 40 ml / in. / min	0 ml / in. / min
External Leakage	≤ 20 ml / in. / min	0 ml / in. / min
Conclusion: the test result is satisfactory according to API 6FA.		

**8. Operational Test:**

The test valve was cooled at 30 °C within 5 minutes after complete the fire test. The operational test was conducted according to API 6FA Para. 4.5. Open the test valve against the high test pressure differential. The test valve was moved to a partly open position close to the shutoff valve. Vent the piping and test valve body cavity to remove air or steam.

Then measured and recorded external leakage for a period of five minutes after valve was in the open position at high test pressure. The test result was recorded on below:

**Test result of operational test**

Item	API 6FA Required Value	Actual Value
Test Pressure ( MPa )	7.5 MPa	7.5 MPa
Test Time	5 minutes	
External Leakage	≤ 200 ml / in. / min	0 ml / in. / min
Conclusion: the test result is satisfactory according to API 6FA.		





**Test Report No.:250808 Rev.1**

The undersigned, hereby declare that I have checked test valve and witnessed the fire test on the test valve according to API SPEC 6FA Third Edition, April 1999, Reaffirmed, September 2011. The test result is satisfactory.

TÜV SÜD Industrie Service GmbH

*Chen Guilin*



Chen Guilin

Date: July 21, 2022

**Annexes:**

- 1) Copy of Drawing No. 10020567 VER. 1.0;
9. Copy of Test Record of Fire Test No. 2017FM306;



