

ISO 15848-1

QUALIFICATION

CERTIFICATE



Industrie Service

Certificate No.: 250797 Rev.1

Ref. Test report No.: 250798 Rev.1

We hereby certify that the valve below has passed the fugitive emission test successfully according to Class BH of ISO 15848-1: 2015 for a total of **205** cycles.

Name of manufacturer	Antiwear (Suzhou) Industrial Intelligent Technology Co., Ltd.
Postal Address of manufacturer	No.988, Yuexiu Road, Fenhu Economic Development Zone, PC: 215200, Suzhou City, Jiangsu Province, P. R. China
Item	AB-8F9RF-C-CG258 Ball Valve
Valve size	8"
Pressure rating	Class 900
Stem size	Φ79.8 mm
Body/bonnet material	ASTM A216 WCB
Seal material	Flexible Graphite
Valve assembly drawing no.	A005284 VER. 1.0

The tested valve covers performance class (para.6.6):

ISO FE BH – CO1 – SSA 0 – t(RT,200°C) – CL900 – ISO 15848-1

Extension of qualification (in particular) to untested valves in accordance with paragraph 8 of ISO15848-1.

Other stem sizes qualified: 39.9mm up to 159.6mm

Other pressure ranges qualified: Class 900 and lower

This certificate must be read in conjunction with test report No.:250798 Rev.1

Shanghai, August 31, 2022
(Place, date)



Guilin Chen
TÜV SÜD Industrie Service GmbH
Westendstr. 199
80686 München Germany

TÜV SÜD Industrie Service GmbH
Shanghai Office
Floor 3-13, No.151, Heng Tong Road,
Shanghai 200070 P. R. China

Tel.: +86 21 6141-0123
Fax: + 86 21 6140-8600



Test Report

(Valve fugitive emission test according to ISO15848-1: 2015)

Certificate No. : 250797 Rev.1
Test Report No.: 250798 Rev.1

Applicant / Manufacturer: Antiwear (Suzhou) Industrial Intelligent Technology Co., Ltd.
No.988, Yuexiu Road, Fenhui Economic Development Zone,
PC: 215200, Suzhou City, Jiangsu Province, P. R. China

Inspection body: TÜV SÜD Industrie Service GmbH
Floor 3-13, No.151, Heng Tong Road, Shanghai, P. R. China

Lab of test: Hefei General Machinery & Electrical Products Inspection Institute
National Quality Supervision and Inspection Centre of Pump and Valve
Products

Test Date: May 22-24, 2017

Description of valves: AB-8F9RF-C-CG258 Ball Valve

Size: 8"

Pressure Rating: Class 900

Drawing No.: A005284 VER.1.0

Test witnessed By: CHEN Guilin / TÜV SÜD Inspector


Test Report No.:250798 Rev.1

Inspection and Tests

1. Conformity of Equipment

The test equipment was verified by TÜV SÜD inspector according to requirements of ISO15848-1:2015 and found satisfactory. The detailed arrangement of the fugitive emission test equipment is shown below:

Figure 1 Typical stem seal leakage and body seal leakage measurement system with Sniffing Method

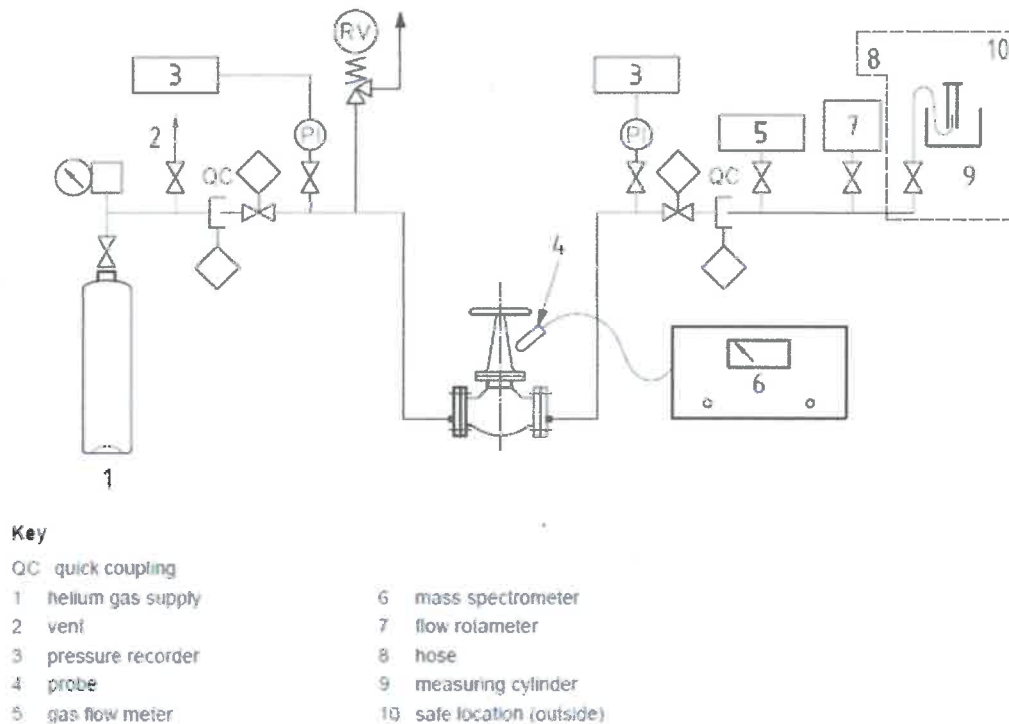

2. Document review

The specific product data file provided by the valve manufacturer includes:

- cross sectional valve assembly drawing;
- bill of valve material
- stem or shaft seal description, dimension and specifications;
- body seal description, dimension and specifications;
- material specifications of stem or shaft seal components;
- hydrostatic test certificate.

The above documents are reviewed with no objection.

Test Report No.:250798 Rev.1

3. Technical Data of Test Valve:

a) General description of test valve

Name of manufacturer	Antiwear (Suzhou) Industrial Intelligent Technology Co., Ltd.
Postal Address of manufacturer	No.988, Yuexiu Road, Fenhui Economic Development Zone, PC: 215200, Suzhou City, Jiangsu Province, P. R. China
Item	AB-8F9RF-C-CG258 Ball Valve
Valve size	8"
Pressure rating	Class 900
Stem size	Ø79.8 mm
Body/bonnet material	ASTM A216 WCB
Seal material	Flexible Graphite
Valve assembly drawing no.	A005284 VER. 1.0

4. Visual and dimensional check of the test valve:

The test valve was chosen at random by the manufacturer in its workshop and submitted to the laboratory. The visual and dimensional check was performed according to drawing No.: A005284 VER.1.0 and results found satisfactory. The mark was verified on valve as following:

	<u>8"</u>	<u>900</u>	<u>WCB</u>
Manufacturer` Brand	Size	Class	Material

The stem size was measured as Ø79.8mm.

Preparation of the test valve:

Before the fugitive emission test, the test valve was hydrostatic tested under 27.0MPa, the test showed no visible leakage or deformation. Then the valve was cleaned and dried, and packing was changed and retightened.

6. Calibration of test instrument

The test instrument was turned on, warmed up at the minimum time according to the requirements of the equipment manufacturer and calibrated with the standard calibrated leak 100% helium according to the procedure specified in Annex A, Para.A.1.4.2 of ISO15848-1:2015.

7. Fugitive emission test and measurement

The test valve was mounted on a test rig with the stem positioned vertical. And the fugitive emission test is carried out as per requirement of ISO15848-1:2015 Para.5.

7.1 Preliminary tests at room temperature (test 1)

Test Report No.:250798 Rev.1

The valve was pressurized with test fluid Helium to 15.4MPa according to manufacturer's requirements in the partly opened position, the temperature at locations "X"/"Y"/"Z" are measure and recorded as room temperature

The stem seal leakage measurement and the body seal leakage measurement was performed by the sniffing method as described in ISO15848-1 Annex B.

The test results are as follows:

Test results of preliminary tests

Item	ISO15848-1 Required Value	Actual Value
Stem leakage (mbar.l/s)	$\leq 1.43 \times 10^{-4}$	2.6×10^{-6}
Body seal leakage(ppmv)	≤ 50	1.4

The test results meet the requirements of ISO15848-1: 2015.

7.2 Mechanical cycle test at the room temperature (test 2)

A total of 50 mechanical cycles was performed on the test valve while it was kept pressurized with 15.4MPa according to manufacturer's requirements at room temperature. The leakage from the stem seal was measured with following results:

Test results of final tests

Item	ISO15848-1 Required Value	Actual Value
Stem leakage (mbar.l/s)	$\leq 1.43 \times 10^{-4}$	3.6×10^{-6}

The test results meet the requirements of ISO15848-1: 2015.

7.3 Static test at the selected test temperature (test 3)

The test valve was heated till to 200°C. The test valve was kept pressurized with 13.2MPa according to manufacturer's requirements at the temperature between 185 and 215°C. The leakage from the stem seal were measured with following results:

Test results of final tests

Item	ISO15848-1 Required Value	Actual Value
Stem leakage (mbar.l/s)	$\leq 1.43 \times 10^{-4}$	6.0×10^{-6}

The test results meet the requirements of ISO15848-1: 2015.

7.4 Mechanical cycle test at the selected temperature (test 4)

A total of 50 mechanical cycles was performed on the test valve while it was kept pressurized with 13.2MPa according to manufacturer's requirements at the temperature between 185 and 215°C. The leakage from the stem seal was measured with following results:

Test results of final tests

Item	ISO15848-1 Required Value	Actual Value
Stem leakage (mbar.l/s)	$\leq 1.43 \times 10^{-4}$	4.8×10^{-6}

The test results meet the requirements of ISO15848-1: 2015.

7.5 Repeat of static test at the room temperature (test 5)

The test valve returned to the room temperature naturally, without artificial cooling/heating. After the

Test Report No.:250798 Rev.1

temperature was stabilized at room temperature. Then the stem seal leakage under 15.4MPa according to manufacturer's requirements was measured using the same method as mentioned above, with following test result:

Test results of final tests

Item	ISO15848-1 Required Value	Actual Value
Stem leakage (mbar.l/s)	$\leq 1.43 \times 10^{-4}$	6.0×10^{-6}
The test results meet the requirements of ISO15848-1:2015.		

7.6 Repeat of mechanical cycle test at the room temperature (test 2)

A total of 50 mechanical cycles was performed on the test valve while it was kept pressurized with 15.4MPa according to manufacturer's requirements at room temperature. The leakage from the stem seal was measured with following results:

Test results of final tests

Item	ISO15848-1 Required Value	Actual Value
Stem leakage (mbar.l/s)	$\leq 1.43 \times 10^{-4}$	6.2×10^{-6}
The test results meet the requirements of ISO15848-1:2015.		

7.7 Repeat of static test at the selected test temperature (test 3)

The test valve was heated till to 200°C. The test valve was kept pressurized with 13.2MPa according to manufacturer's requirements at the temperature between 185 and 215°C. The leakage from the stem seal were measured with following results:

Test results of final tests

Item	ISO15848-1 Required Value	Actual Value
Stem leakage (mbar.l/s)	$\leq 1.43 \times 10^{-4}$	6.4×10^{-6}
The test results meet the requirements of ISO15848-1: 2015.		

7.8 Repeat of Mechanical cycle test at the selected temperature (test 4)

A total of 50 mechanical cycles was performed on the test valve while it was kept pressurized with 13.2MPa according to manufacturer's requirements at the temperature between 385 and 415°C. The leakage from the stem seal was measured with following results:

Test results of final tests

Item	ISO15848-1 Required Value	Actual Value
Stem leakage (mbar.l/s)	$\leq 1.43 \times 10^{-4}$	6.1×10^{-6}
The test results meet the requirements of ISO15848-1:2015.		

7.9 Intermediate static test at the room temperature (test 5)

The test valve returned to the room temperature naturally, without artificial cooling/heating. After the temperature was stabilized at room temperature, the leakage from the stem seal was measured with following results while it was kept pressurized with 15.4MPa:

Test results of final tests

Item	ISO15848-1 Required Value	Actual Value
Stem leakage (mbar.l/s)	$\leq 1.43 \times 10^{-4}$	6.2×10^{-6}
The test results meet the requirements of ISO15848-1: 2015.		

Test Report No.:250798 Rev.1

7.10 Final test at the room temperature (test 6)

A total of 5 mechanical cycles was performed on the test valve while it was kept pressurized with 15.4MPa. The leakage from the stem seal and from the valve body seal under 15.4MPa according to manufacturer's requirements were both measured using the same method as mentioned in paragraph 7.1, with following results:

Test results of final tests at room temperature (test 6)

Item	ISO15848-1 Required Value	Actual Value
Stem leakage (mbar.l/s)	$\leq 1.43 \times 10^{-4}$	5.9×10^{-6}
Body seal leakage(ppmv)	≤ 50	1.5
The test results meet the requirements of ISO15848-1:2015.		

8. Post test examination

After all the above tests completed, the test valve was disassembled and all sealing components visually examined. It is found that no notable wear and any other significant observations.

9. Performance classes

As a result of the above tests, the test valve covered performance classes as follows:

ISO FE BH – CO1 – SSA 0 – t(RT,200 °C) – CL900 – ISO 15848-1

10.Extension of qualification to untested valves shall be according to ISO15848-1:2015 paragraph 8.

We, hereby declare that I have checked test valve and witnessed the fugitive emission test on the tested valve according to ISO15848-1: 2015. The test results are as mentioned in this report.

TÜV SÜD Industrie Service GmbH



Chen Guilin

Date: August 31, 2022

Annexes:

- 1) Copy of Drawing No.: A005284 VER.1.0;
- 2) Test Report of Fugitive Emission Test No. 2017FM295